


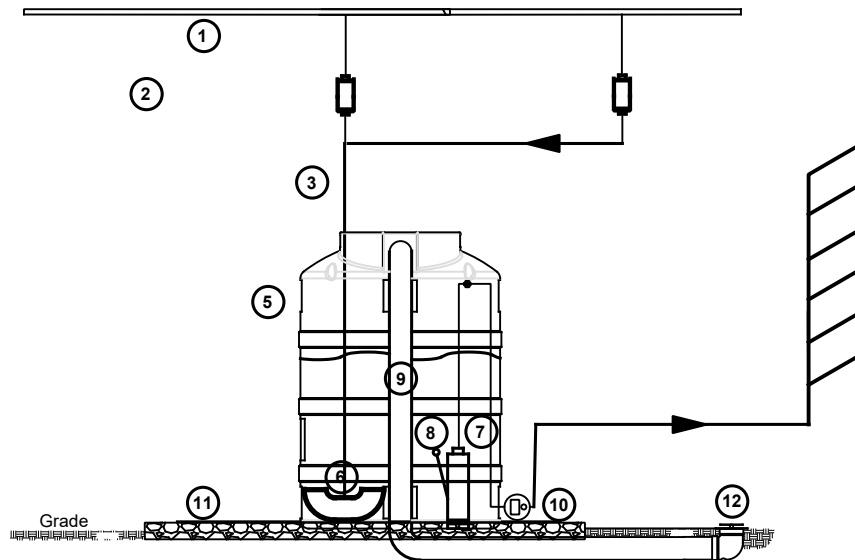

- | | |
|---|---|
| ① Rainwater collection point (roof drains, gutters, etc). | ⑦ Submersible pump, 6" max submergence |
| ② Leafcatcher Advanced self-cleaning rainwater prefilters on downspouts | ⑧ Low water cut off float switch |
| ③ Schedule 40 pipe | ⑨ Overflow |
| ④ Gasket or seal to prevent insects | ⑩ Controller with pressure tank |
| ⑤ Above-ground tank | ⑪ Base of gravel or concrete recommended |
| ⑥ Smoothing Inlet - "flow-calming" device to prevent turbulence in the cistern, and aerate. Constructed of elbows & tee | ⑫ Popup emitter to prevent insect intrusion |

RAINWATER HARVESTING SYSTEM DETAIL

GEORGIA WATER TANKS 404-991-0404

ABOVE GROUND TANK, SUBMERSIBLE PUMP, PRESSURE TANK


NOT TO SCALE




Products: Leaf Eater Advanced

Code: RHAD99 – 3"
RHAD98 – 4"

The Next Generation in
Rain Heads.



Horizontal Position



Vertical Position

Product Description

Keeps your Rain Harvesting system free of mosquitoes, vermin and debris.

The Leaf Eater Advanced™ is the next generation Rain Head, featuring the new Clean Shield™ (single screen) technology and VH Pivot™ outlet. The Leaf Eater Advanced™ Rain Head prevents debris from entering the Rain Harvesting system, improves water quality and reduces tank/cistern maintenance. The single screen incorporates Clean Shield™ technology which deflects leaves and debris away from the flow of water. This minimises maintenance and enhances catchment efficiency. This Rain Head incorporates a VH Pivot™ outlet that swivels to suit vertical or horizontal downspouts. The Leaf Eater Advanced™ can also be used as a debris removing device even when rainwater is not being collected.


Features and Benefits

- Compact, versatile rain head for quick and easy installation
- Single screen technology for advanced debris shedding (Clean Shield™)
- Minimal maintenance
- Superior catchment efficiency at low and high flow rates
- Pivot the outlet to suit vertical or horizontal (rear outlet) downspouts (VH Pivot™)
- High flow rate performance
- Single screen with 1/32" aperture mosquito proof stainless steel mesh
- Include adaptor for secure connection to downspout

Installation


Gutter & Mid-Mount Installation

1. Gutter: Measure 10½" from the bottom of the existing gutter pop and remove this section of downspout. Ensure the cut edge is clean and smooth. Mid-Mount: Remove 10½" of downspout where the Leaf Eater Advanced™ is to be situated. Ensure all cut edges are clean and smooth. (figure 1)
2. Using the quick release tabs remove the Clean Shield™ screen by lifting it up and then out. (figure 2)
3. Insert the Leaf Eater Advanced™ by sliding it up over the cut section and then down into position. The Leaf Eater Advanced™ outlet should be slid firmly onto the bottom downspout until it can be pushed no further. (figure 3)
4. Screw the Leaf Eater Advanced™ into position through the screw slots provided. Ensure appropriate screws and anchors (if required) are used. (figure 5)
5. Insert the Clean Shield™ screen into the Leaf Eater Advanced™. Ensure the Clean Shield™ screen is sitting firmly in place and check installation is secure. (figure 6)

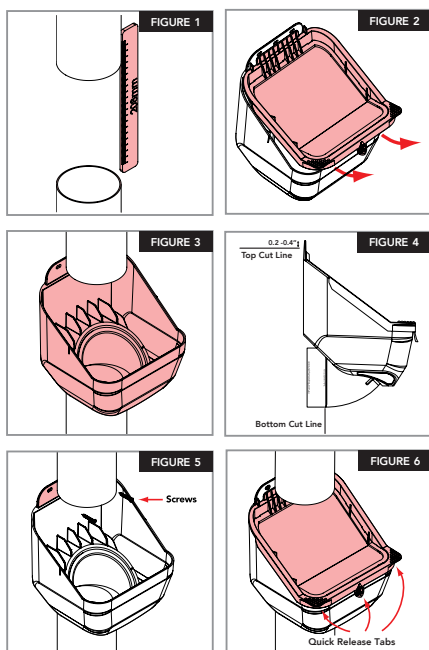

Horizontal (Rear Outlet) Installation

1. Using the quick release tabs remove the Clean Shield™ screen by lifting it up and then out. (Figure 2)
2. Swivel the outlet to the horizontal position – some force may be required.
3. Position the Leaf Eater Advanced™ next to existing pipework, mark and cut top and bottom cut lines as per figure 4. Ensure the cut edge is clean and smooth.
4. Insert the Leaf Eater Advanced™ by sliding the rear outlet into the horizontal pipe. The back fixing plate must sit behind the top section of downspout. (figure 3)
5. Screw the Leaf Eater Advanced™ into position through the screw slots provided. Ensure appropriate screws and anchors (if required) are used. (figure 5)
6. Insert the Clean Shield™ screen into the Leaf Eater Advanced™. Ensure the Clean Shield™ screen is sitting firmly in place and check installation is secure. (figure 6)

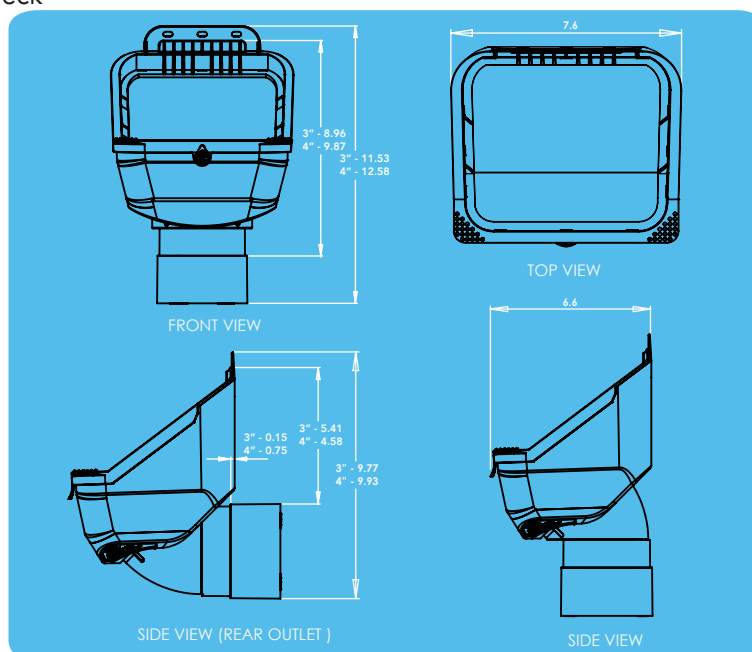

ALL DIMENSIONS IN INCHES UNLESS OTHERWISE STATED.

Maintenance

The Clean Shield™ screen is mostly self cleaning. If cleaning is required simply lift the Clean Shield™ screen out by taking hold of the quick release tabs and pull the Clean Shield™ screen upwards and outwards, then hose or brush off.

DISCLAIMER This product specification is not a complete guide to product usage. Further information is available from Rain Harvesting Pty Ltd and from the Installation and Operating Instructions. This specification sheet must be read in conjunction with the Installation and Operating Instructions and all applicable statutory requirement. Product specifications may change without notice. © Rain Harvesting Pty Ltd

Water Tanks



Black or Dark Opaque Green Vertical Water Tanks ranging from 300 to 15,500 gallons



Snyder provides a wide range of above ground storage tanks for indoor or outdoor use where wells do not meet the consumption needs of the users. **All Snyder black and opaque dark green water tanks are certified to NSF/ANSI 61 for potable water storage.** Optional fittings are available.

- The black or dark green color limits sunlight penetration and inhibits algae growth.
- All materials are UV stabilized for long-term outdoor service.
- 2" bulkhead drain fitting and 1 1/2" bulkhead float valve fitting are standard on most tanks.
- Molded-in gallonage markers on most tanks.
- Weatherproof threaded lids with built-in vents.
- Additional venting may be required.
- Molded-in tie-down slots and lifting lugs.
- Off-set fill-wells.



Molded-in platform for 18" or 24" lids aids in leak-proofness.



Top fitting is a 1-1/2" polypropylene bulkhead fitting for float valves.



Molded-in gallonage graduation marks.



Lower fitting is a 2" bulkhead.



Snyder also offers a variety of natural colored vertical storage tanks, horizontal tanks, utility tanks (pick up tanks), and PCO tanks ideal for hauling water.

Integral tie-down lugs for positive anchoring.



Simplex No.	Part No.	Color	Capacity	F.O.B.	DIA	Height	Fill	Ftg. Pkg.
WB23	8040000W94203	Black	300 Low Vertical	M	46"	50"	18"	A
WG23	8040000W99803	Green		M				A
WB21	1630000W94203	Black	300 Vertical	M	35"	80 1/2"	18"	A
WG21	1630000W99803	Green		M				A
WB22	1630100W94203*	Black	300 Vertical	C	36"	82"	10"	A
WG22	1630100W99803	Green		C				A
WB24R	1008200W94203	Black	330 Vertical	C	47"	49 1/2"	18"	A
WG24R	1008200W99803	Green		C				A
WB34	1800400W94203	Black	550 Vertical	C	48"	77"	18"	A
WG34	1800400W99803	Green		C				A
	1800500W94203	Black	550 Vertical	M	48"	75"	18"	A
	1800500W99803	Green		M				A
WB33	1820000W94203	Black	550 Vertical	C	64"	46"	18"	A
WG33	1820000W99803	Green		C				A
WB32	8060000W94203	Black	550 Vertical	M,P	64"	48"	18"	A
WG32	8060000W99803	Green		M,P				A
WB41R	1008600W94203	Black	1000 Vertical	C	72"	65"	18"	B
WG41R	1008600W99803	Green		C				B
WB40R	1013300W94203	Black	1025 Narrow	M	60"	95 1/2"	18"	B
WG40R	1013300W99803	Green		M				B
WB42	1710100W94203	Black	1100 Vertical	L,P	86"	53"	18"	B
WG42	1710100W99803	Green		L,P				B

FITTING PACKAGES

F.O.B.

A = Bottom Fitting: 2" bulkhead fitting (63481)
Top Fitting: 1-1/2" bulkhead fitting (63931)

B = Bottom Fitting: 2" bulkhead fitting (60405)
Top Fitting: 1-1/2" bulkhead fitting (63931)

C = Chowchilla, CA

L = Lincoln, NE

C = Bottom Fitting: 2" bulkhead fitting (63683)
Top Fitting: 1-1/2" bulkhead fitting (63931)

D = Bottom Fitting: 2" bolt-on fitting (34100369)
Top Fitting: 1-1/2" bulkhead fitting (63931)

M = Marked Tree, AR

P = Philippi, WV

Simplex No.	Part No.	Color	Capacity	F.O.B.	DIA	Height	Fill	Ftg. Pkg.
WB43	8120000W94203	Black	1100 Vertical	M	86"	55"	18"	B
WG43	8120000W99803	Green		M				B
WB44	1710200W94203	Black	1100 Vertical	C	86"	53"	18"	B
WG44	1710200W99803	Green		C				B
WB45	1770000W94203	Black	1500 Vertical	L,P	86"	70"	18"	B
WG45	1770000W99803	Green		L,P				B
WB46	1770300W94203	Black	1500 Vertical	C	86"	70"	18"	B
WG46	1770300W99803	Green		C				B
WB47	8120100W94203	Black	1500 Vertical	M	86"	71"	18"	B
WG47	8120100W99803	Green		M				B
WB60	5090100W94203	Black	2500 Vertical	L,P	90"	106"	18"	C
WG60	5090100W99803	Green		L,P				C
WB61	8140000W94203	Black	2500 Vertical	M	90"	107"	18"	C
WG61	8140000W99803	Green		M				C
WB62	5090200W94203	Black	2600 Vertical	C	96"	91"	24"	C
WG62	5090200W99803	Green		C				C
WB70P	5130100W94303	Black	3000 Vertical	P	90"	125"	18"	C
WG70P	5130100W99803	Green		P				C
WB70	7410000W94203	Black	3000 Vertical	L	102"	97 1/2"	18"	C
WG70	7410000W99803	Green		L				C
WB71	8390000W94203	Black	3000 Vertical	M	102"	98"	18"	C
WG71	8390000W99803	Green		M				C

FITTING PACKAGES

F.O.B.

A = Bottom Fitting: 2" bulkhead fitting (63481)
Top Fitting: 1-1/2" bulkhead fitting (63931)

B = Bottom Fitting: 2" bulkhead fitting (60405)
Top Fitting: 1-1/2" bulkhead fitting (63931)

C = Chowchilla, CA

L = Lincoln, NE

C = Bottom Fitting: 2" bulkhead fitting (63683)
Top Fitting: 1-1/2" bulkhead fitting (63931)

D = Bottom Fitting: 2" bolt-on fitting (34100369)
Top Fitting: 1-1/2" bulkhead fitting (63931)

M = Marked Tree, AR

P = Philippi, WV

Simplex No.	Part No.	Color	Capacity	F.O.B.	DIA	Height	Fill	Ftg. Pkg.
WB73	7410200W94203	Black	3000 Vertical	C	102"	93"	24"	C
WG73	7410200W99803	Green		C				C
WB72	5130200W94209	Black	3000 Vertical	C	96"	112"	24"	C
WG72	5130200W99803	Green		C				C
WB81	8210000W94203	Black	5000 Vertical	M	102"	155"	18"	C
WG81	8210000W99803	Green		M				C
WB82P	1002000W94203	Black	5000 Vertical	P	102"	156"	18"	C
WG82P	1002000W99803	Green		P				C
WB83	7420100W94203	Black	5000 Vertical	C	102"	159"	24"	C
WG83	7420100W99803	Green		C				C
WB84	7000200W94203	Black	5000 Low Vertical	C	144"	91"	24"	C
WG84	7000200W99803	Green		C				C
WB100	5330200W94203	Black	10000 Vertical	C	144"	161"	24"	C
WG100	5330200W99803	Green		C				C
WB101	5330000W94203	Black	10500 Vertical	L,P	142"	169"	18"	D
WG101	5330000W99803	Green		L,P				D
	44814	Black	15500 Vertical	C	141"	244"	24"	C
	44816	Green		C				C

FITTING PACKAGES

F.O.B.

A = Bottom Fitting: 2" bulkhead fitting (63481)
Top Fitting: 1-1/2" bulkhead fitting (63931)

B = Bottom Fitting: 2" bulkhead fitting (60405)
Top Fitting: 1-1/2" bulkhead fitting (63931)

C = Chowchilla, CA

L = Lincoln, NE

C = Bottom Fitting: 2" bulkhead fitting (63683)
Top Fitting: 1-1/2" bulkhead fitting (63931)

D = Bottom Fitting: 2" bolt-on fitting (34100369)
Top Fitting: 1-1/2" bulkhead fitting (63931)

M = Marked Tree, AR

P = Philippi, WV

Snyder warrants that if any manufactured tank product is proven to be defective in material or workmanship within three (3) years from the date of manufacture, Snyder will (at company option), either replace or repair said part. This standard limited warranty does not apply to damages resulting from misuse, improper application of recommended materials, accident, or improper installation or maintenance. Remedy to the buyer is limited to the replacement of any defective product (or its component, where applicable), F.O.B. point of manufacture. The buyer's remedy under this warranty does not include any other direct or consequential damages which result from defects in material and/or workmanship of its products. TANKS ARE ENGINEERED FOR WATER STORAGE ONLY.




BLACK OR DARK OLIVE GREEN

Black stocked at Georgia Water Tanks
404-991-0404.

PART NUMBER

1008600W94203	ASM TK 1000 VDT X 72 HD/BLK WATER
1008600W99803	ASM TK 1000 VDT X 72 HD/GDO WATER

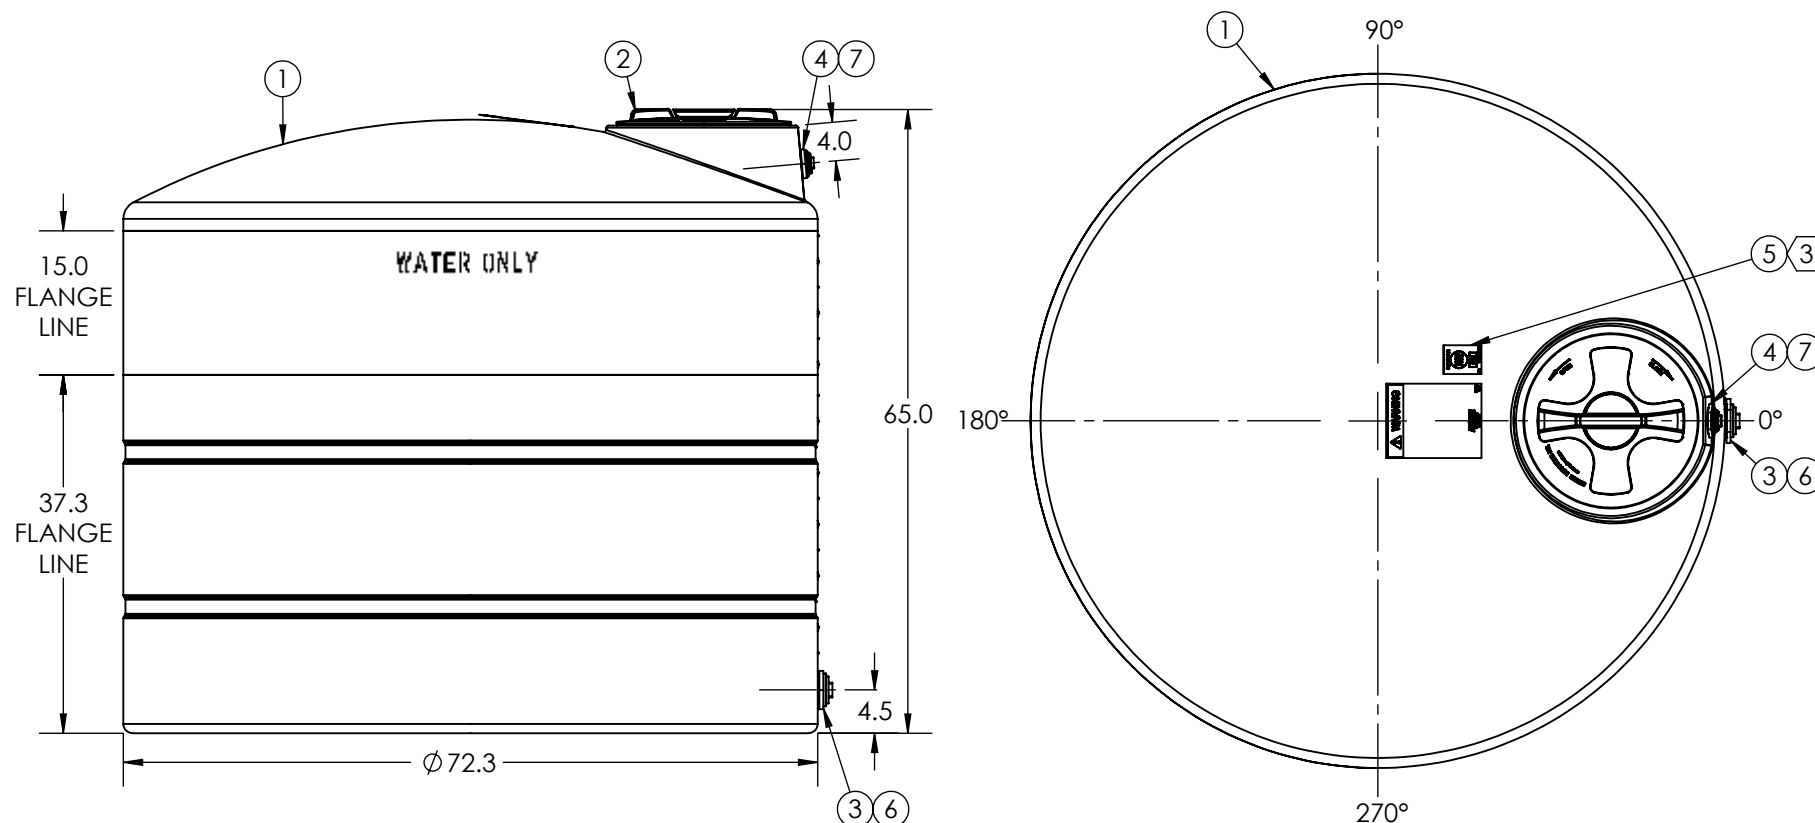

7	1	64149	1-1/2" NPT PLUG
6	1	60021	2" NPT PLUG
5	1	99700231	DECAL NSF MARK - WATER TKS
4	1	63931	FTG PP 1-1/2IN ECO-BH EPDM TXT
3	1	60405	FTG PP 2IN BH EPDM TXT
2	1	34700087	ASM MANWAY 18IN PE W/4IN VENT W/TIE SII
1	1	1008600W__02	ASM TK 1000 X 72 WATER NH NOMW

ITEM NO.	QTY.	PART NUMBER	DESCRIPTION
DO NOT SCALE		DRAWN BY	REVISION
Released		SB	A
© SNYDER INDUSTRIES INC., 2016		TITLE: ASM TK 1000VDT X 72 WATER	
ALL DIMENSIONS, DESIGNS, AND INFORMATION ON THIS PRINT MUST BE CONSIDERED PROPRIETARY TO SNYDER INDUSTRIES, INC. AND MAY NOT BE USED, COPIED, OR DISTRIBUTED WITHOUT WRITTEN PERMISSION OF AN OFFICER (OR HIS AGENT) OF THE FIRM.		(402) 467-5221 www.snyderent.com	PART NO. 1008600W__03 ENG. ID. D006385

*ALL EXTERNAL PIPING MUST BE INDEPENDENTLY SUPPORTED.
*ONLY BASE FITTINGS TO BE LEFT INSTALLED AT TIME OF SHIPMENT PER SII PROCEDURE.
*Consult Snyder's Guidelines for Use and Installation prior to delivery.
Available on-line at <http://www.snyderindustriestanks.com/Technical>
ALL DIMENSIONS ARE IN INCHES, NOMINAL, & SUBJECT TO CHANGE WITHOUT NOTICE.
ALL DIMENSIONS ON ROTATIONAL MOLDED PARTS ARE SUBJECT TO A ± 3% TOLERANCE.

Black stocked at Georgia Water Tanks
404-991-0404.

RECOMMENDED
POSITION

3-21/32



FLANGE LINES

94-31/32

106

108-1/32

RECOMMENDED
POSITION

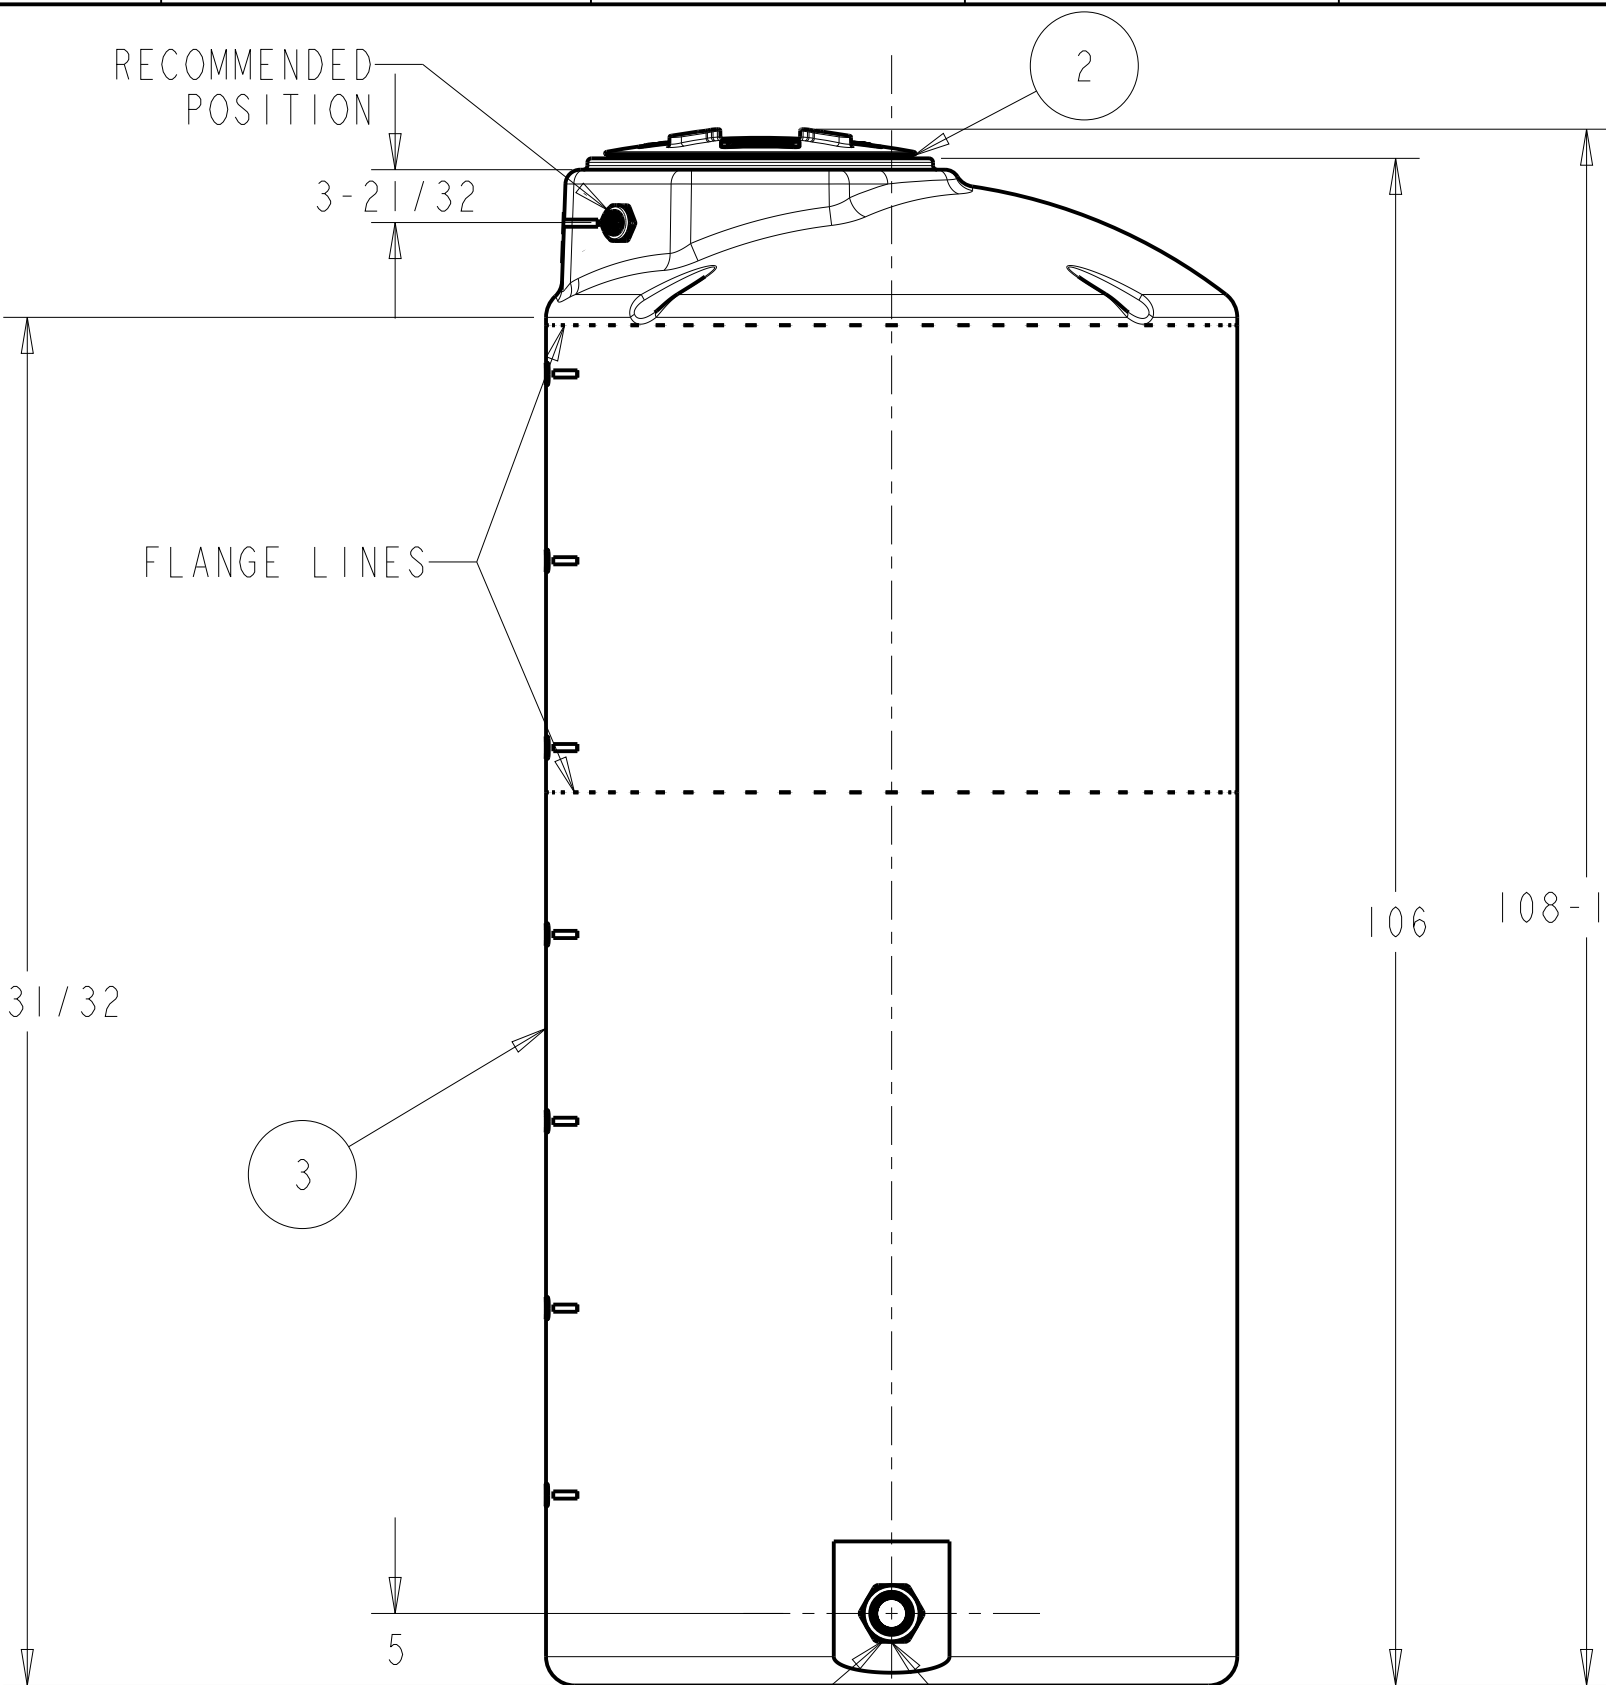
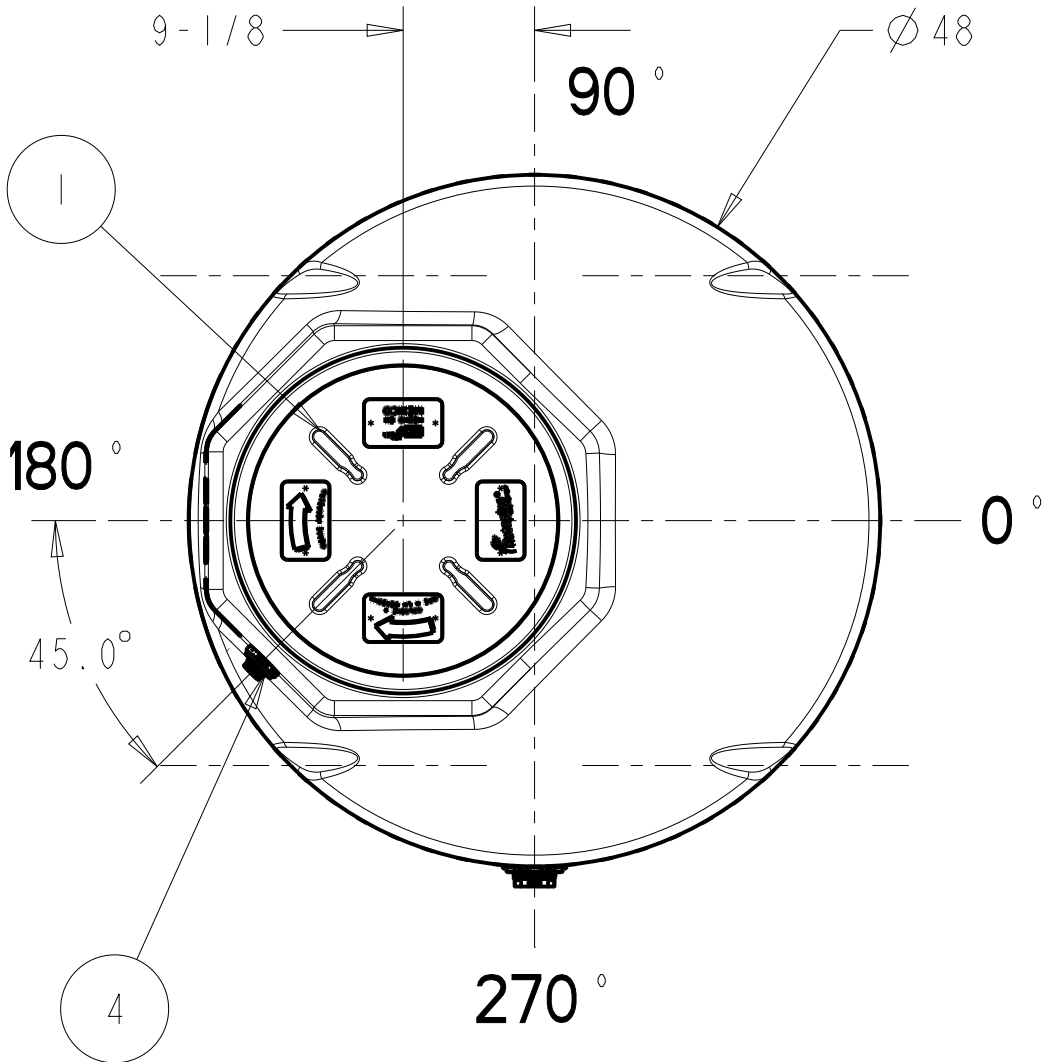


No.	QTY	CODE	DESCRIPTION	MATERIAL	OBSERVATIONS
1	1	A-D-142	18" CAP	PP	BLACK COLOR
2	1	A-D-235	18" CAP RING	PP	BLACK COLOR
3	1	R-D-150	VERTICAL TANK 750 GAL	HDPE	
4	1	TF-075	3/4" BULKHEAD TANK FITTING BANJO	PP	BLACK COLOR
5	1	TF-3200	2" BULKHEAD TANK FITTING BANJO	PP	BLACK COLOR

INNOVATION AND DEVELOPMENT CENTER		Rotoplas. más y mejor agua		MATERIAL: HDPE	
PROJECT:		VERTICAL TANKS USA IG		FINISHED SURFACE:	
DESCRIPTION:		ASSY VERTICAL TANK 750 GAL		REFERENCE DRAWING:	
				CODE: R-B-538	REV: 1

Stocked at Georgia Water Tanks 404-991-0404.
Available in Green and Black.


PART NUMBER	COLOR
32511	BLACK
32513	GREEN

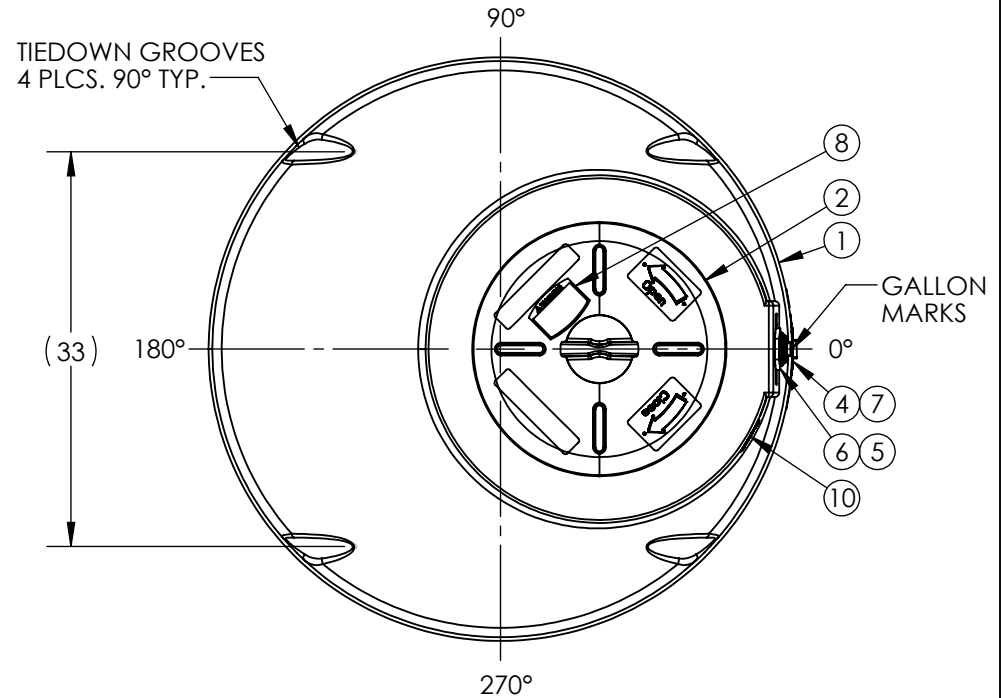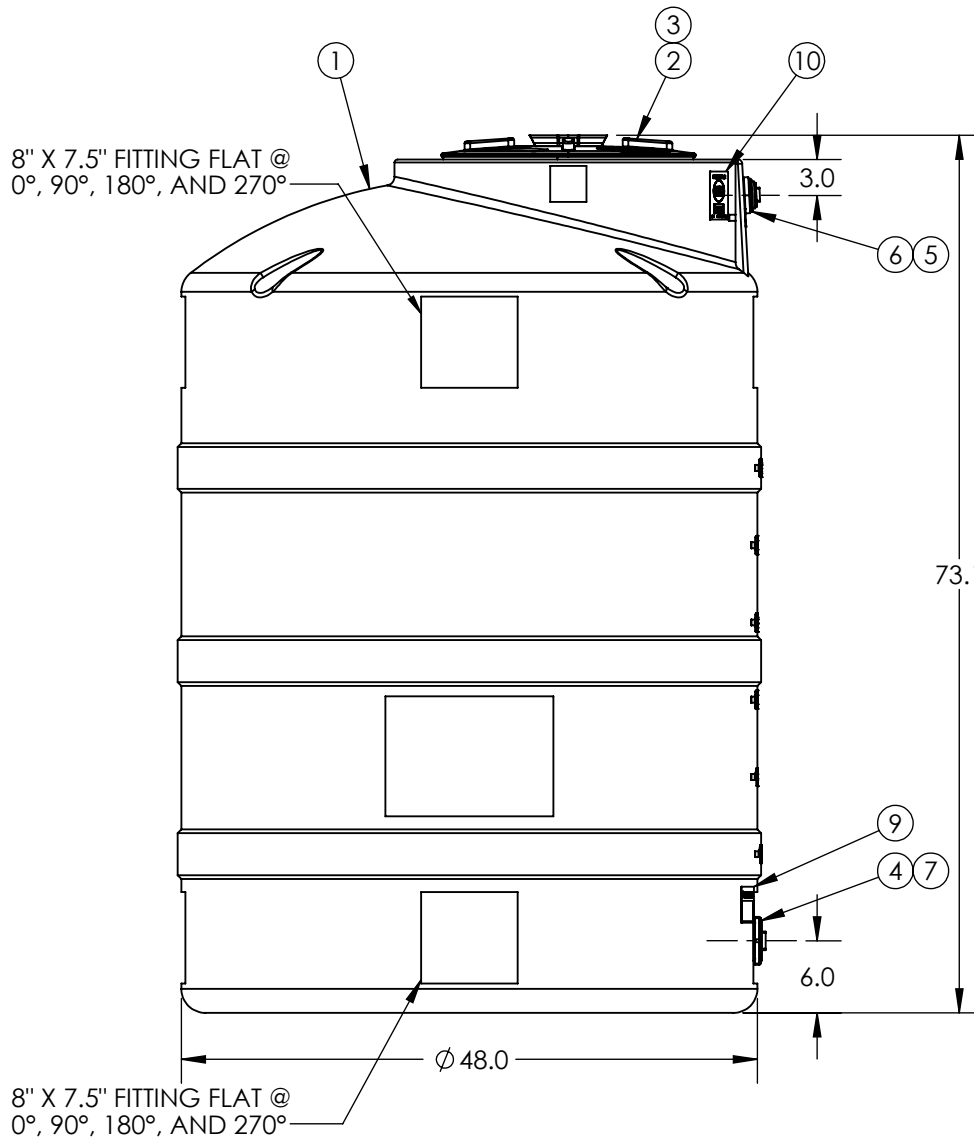

10	1	99700231	DECAL NSF MARK - WATER TKS
9	1	61847	DECAL AG WARNING - SMALL
8	1	61848	DECAL AG WARNING - LARGE
7	1	60021	2\" NPT PLUG
6	1	63931	FTG PP 1-1/2IN ECO-BH EPDM TXT
5	1	64149	1-1/2\" NPT PLUG
4	1	63481	FTG 2IN STD BH PP/EPDM
3	8	60081	SCREW #9 X 1\" SS 5\"-22\" LID
2	1	64448	MANWAY 20IN W/VENT R
1	1	30337-FW	500 V R

ITEM NO.	QTY.	PART NUMBER	DESCRIPTION			
DO NOT SCALE		DRAWN BY		TITLE:	REVISION	
STATUS:	Released			IGG	500 V WATER R WF	A
© SNYDER INDUSTRIES, LLC, 2020						SHEET 1 OF 1
ALL DIMENSIONS, DESIGNS, AND INFORMATION ON THIS PRINT MUST BE CONSIDERED PROPRIETARY TO SNYDER INDUSTRIES, LLC, AND MAY NOT BE USED, COPIED, OR DISTRIBUTED WITHOUT WRITTEN PERMISSION OF AN OFFICER (OR HIS AGENT) OF THE FIRM.			(402) 467-5221 www.snyderintl.com	PART NO.	ENG. ID.	
				SEE CHART	A017989	

*ALL EXTERNAL PIPING MUST BE INDEPENDENTLY SUPPORTED.
*ONLY BASE FITTINGS TO BE LEFT INSTALLED AT TIME OF SHIPMENT PER SII PROCEDURE.
ALL DIMENSIONS ARE IN INCHES, NOMINAL, & SUBJECT TO CHANGE WITHOUT NOTICE.
ALL DIMENSIONS ON ROTATIONAL MOLDED PARTS ARE SUBJECT TO A ± 3% TOLERANCE.

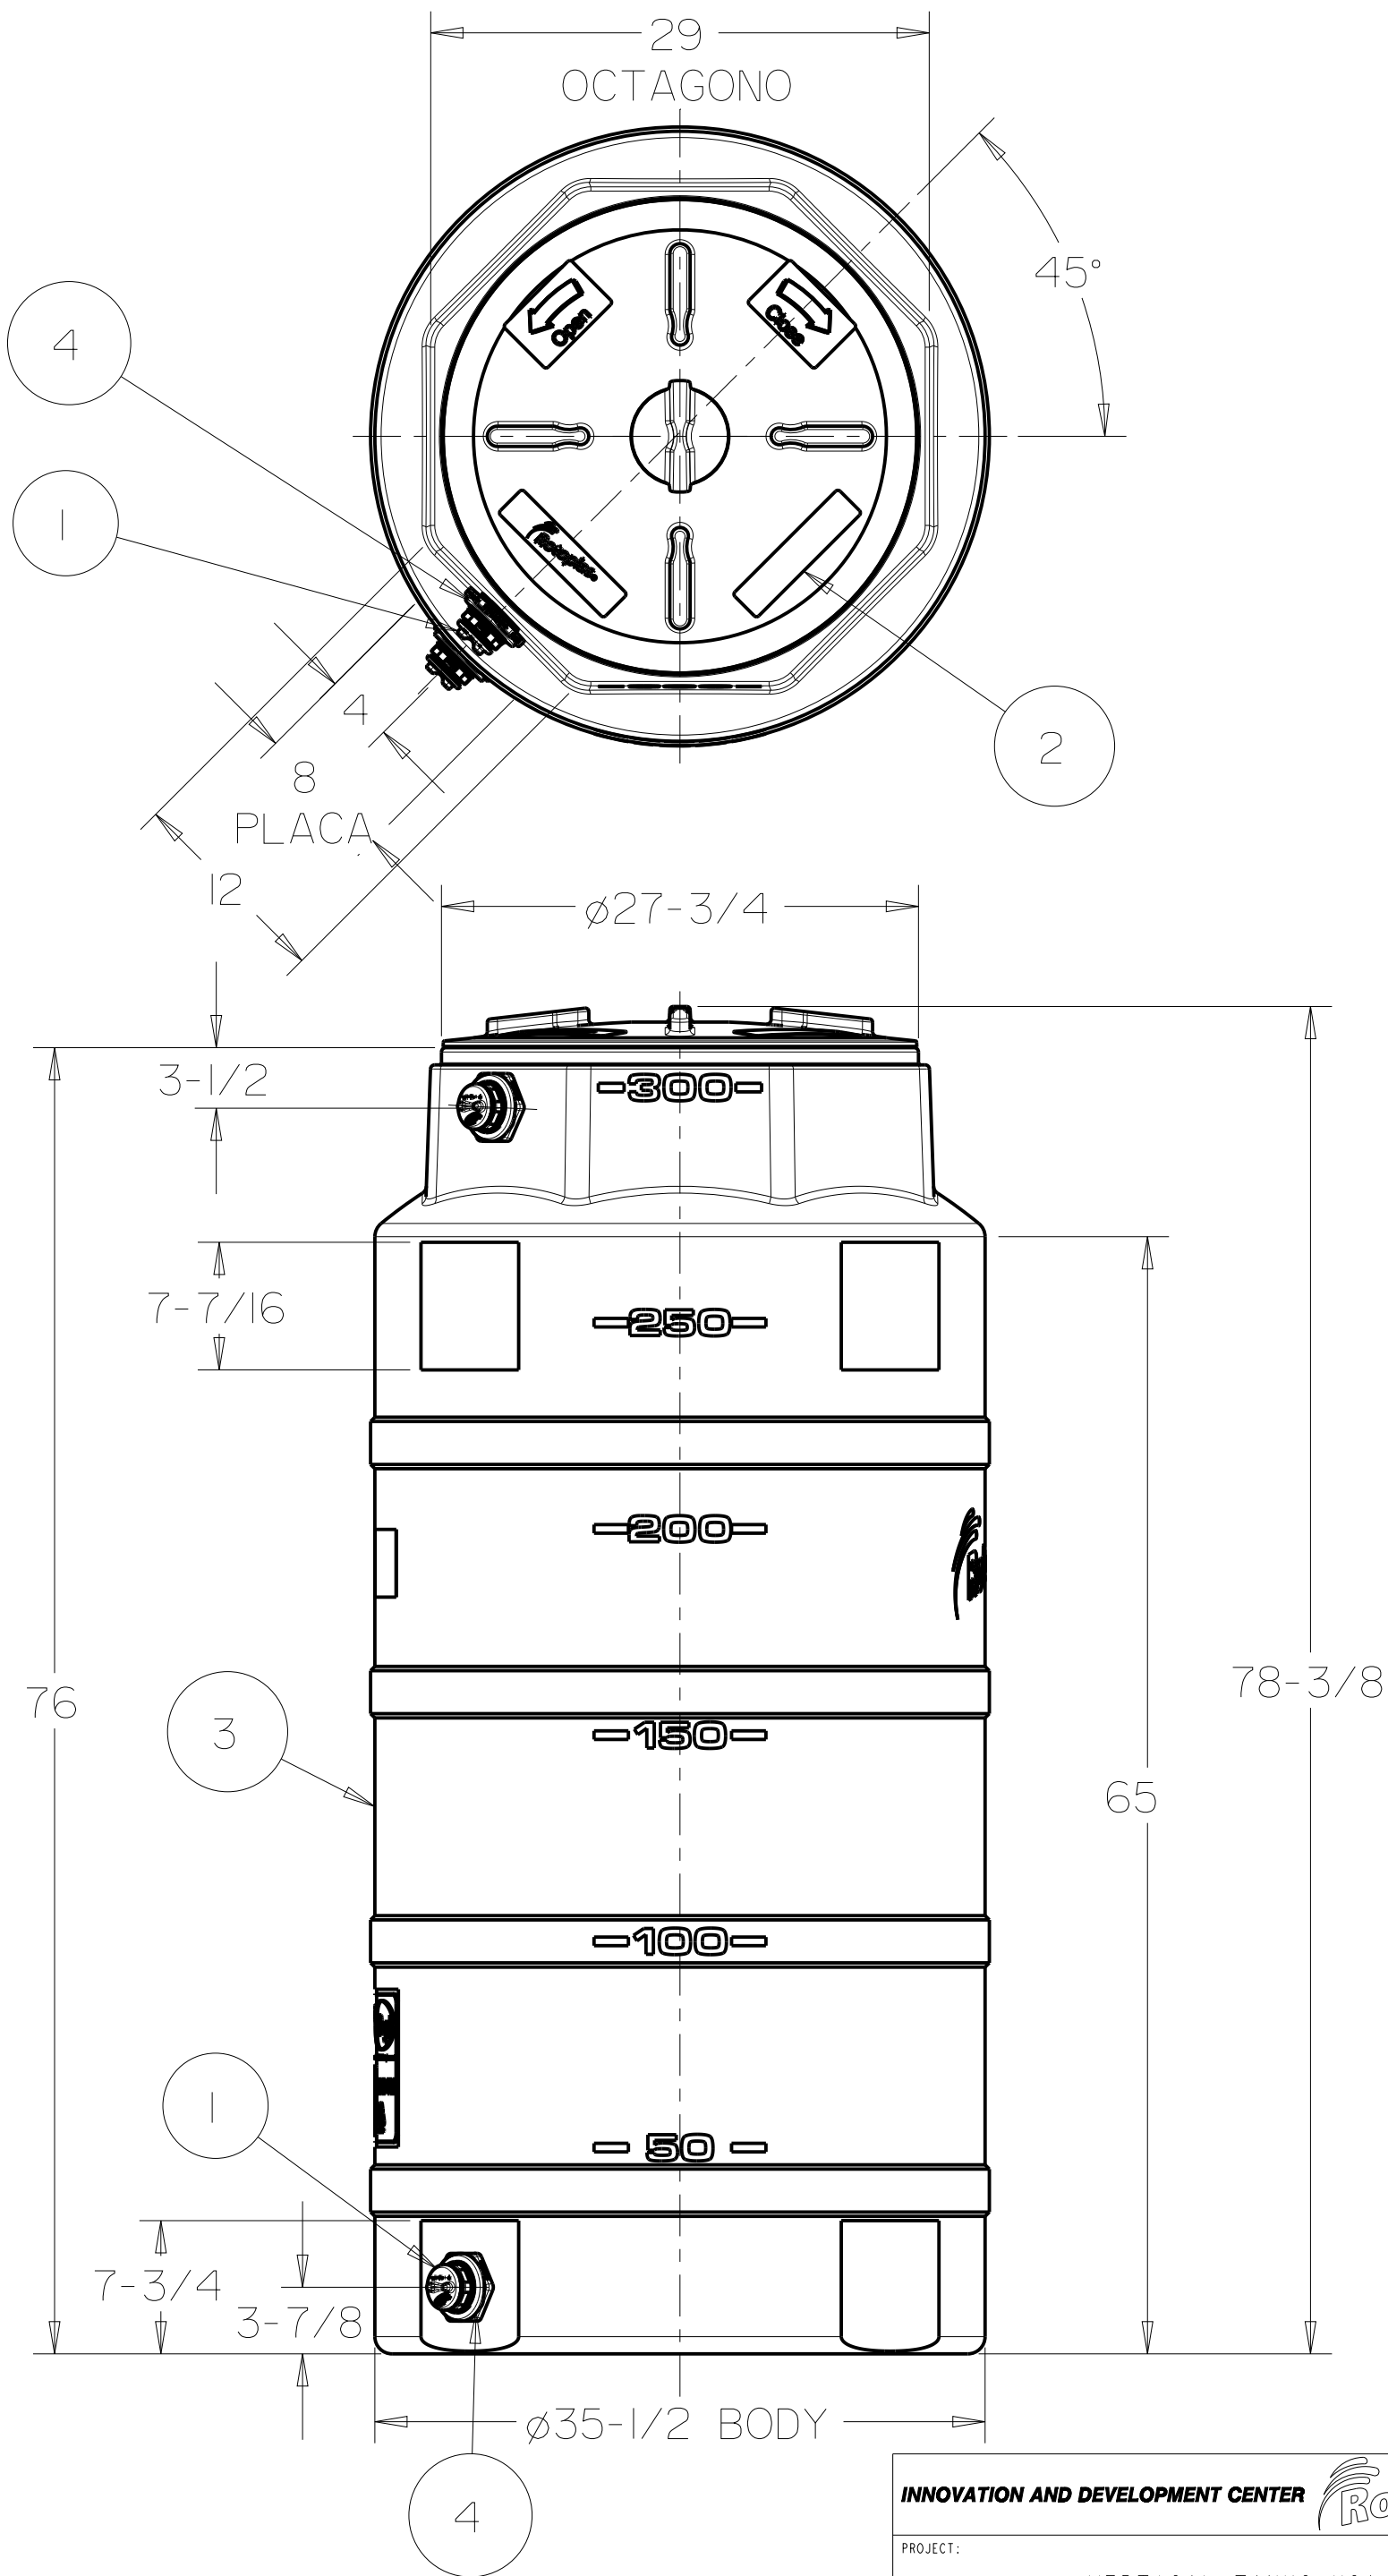

ITEM	QTY	CODE	DESCRIPTION	MATERIAL	OBSERVATIONS
4	2	TF-200	2" BULKHEAD TANK FITTING BANJO	PP + EPDM	COLOUR: BLACK
3	1	R-D-216	TANK 300 GAL CURED	POLYETHYLENE POWDER HD	COLOURS: SEE ET
2	1	R-B-562	ASSY END CAP 24 INCH WITH VENT	PE + PP	COLOUR: BLACK
1	2	A-D-146	MALE PLUG 2 INCH PLUG200	GR-MAT-33-MP	COLOUR: BLACK

Stocked at Georgia Water Tanks, 404-991-0404. Available in Green and Black. Note that the 500 gallon tank costs just a few dollars more than the 300 gallon.

NOTE:
1. THE MANHOLE OF THE TANK HAVE THE FLEXIBILITY TO PUT END CAPS OF 18, 22 AND 24 INCH

INNOVATION AND DEVELOPMENT CENTER 		MATERIAL: HDPE	
PROJECT: VERTICAL TANKS USA 3G		FINISHED SURFACE: SAND BLAST	
DESCRIPTION: ASSY VERTICAL TANK 300 GAL		REFERENCE DRAWING:	
		CODE: R-B-700	REV: 0

TOP MULTI-TECH

Multi-stage automatic submersible pumps

-  Clean water
-  Domestic use
-  Civil use

**AUTOMATIC
START & STOP**



PERFORMANCE RANGE

- Flow rate up to **120 l/min** (7.2 m³/h)
- Head up to **53 m**
- Restart pressure: **1.5 bar**

APPLICATION LIMITS

- **5 m** maximum immersion depth
- Maximum height between pump and point of use **10 m**
- Maximum liquid temperature **+40 °C**
- Suction down to **35 mm** above ground level
- Continuous service **S1**

CONSTRUCTION AND SAFETY STANDARDS

Complete with:

- **10 m** long power cable
- internal electronic device for pump starting (when tap opened) and stopping (when tap closed)
- threaded connector 1¼" (delivery)
- hose connector Ø 35 mm

EN 60335-1
IEC 60335-1
CEI 61-150

EN 60034-1
IEC 60034-1
CEI 2-3



CERTIFICATIONS

Company with management system certified DNV
ISO 9001: QUALITY

INSTALLATION AND USE

TOP-MULTI-TECH pumps are recommended for pumping **clean water** and liquids that are not chemically aggressive for the materials from which the pump is made.

Because of their high efficiency and reliability they are suitable for use in applications such as domestic water supply from reservoirs, tanks or relatively deep wells, for drawing rain water from cisterns to water gardens or for use in irrigation systems, etc.

An internal electronic device starts or stops the pump automatically when the tap is opened or closed.

PATENTS - TRADE MARKS - MODELS

- Patent n. EP2990653
- TOP MULTI® Registered Trade Mark n. 0001334477

OPTIONS AVAILABLE ON REQUEST

- Other voltages



Georgia Water Tanks stocks 120V & 240V/1Ø

GUARANTEE

2 years subject to terms and conditions

CHARACTERISTIC CURVES AND PERFORMANCE DATA

60 Hz $n = 3450 \text{ min}^{-1}$

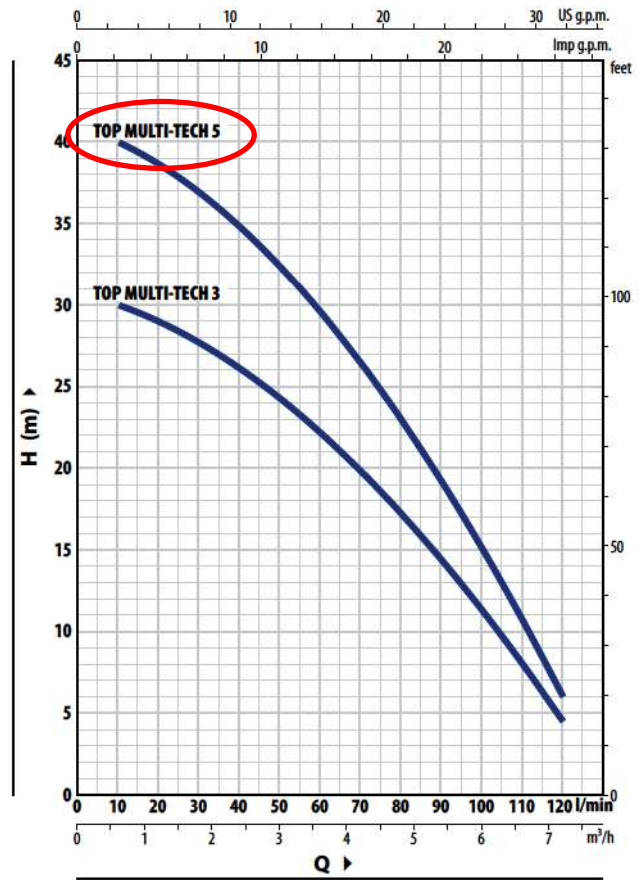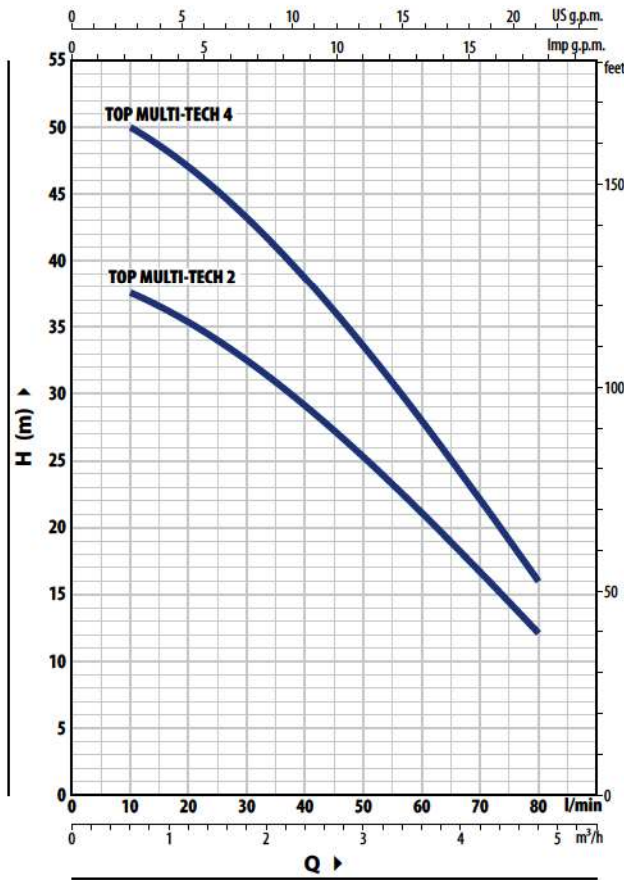

TOP MULTI-TECH 2 - 4

MODEL	POWER (P ₂)		Q	m³/h	0	0.6	1.2	1.8	2.4	3.0	3.6	4.2	4.8
Single-phase	kW	HP		l/min	0	10	20	30	40	50	60	70	80
TOP MULTI-TECH 2	0.55	0.75	H metres	39	37.5	35.5	32.5	29	25	21	16.6	12	
TOP MULTI-TECH 4	0.75	1		52	50	47	43	38.5	33.5	28	22.1	16	

TOP MULTI-TECH 3 - 5

MODEL		POWER (P ₂)		Q	m³/h	0	0.6	1.2	1.8	2.4	3.0	3.6	4.2	4.8	5.4	6.0	6.6	7.2
Single-phase		kW	HP		l/min	0	10	20	30	40	50	60	70	80	90	100	110	120
TOP MULT-TECH 3		0.55	0.75	H metres	30.5	30	29	27.5	26	24.3	22.2	19.8	17.2	14.4	11.3	8	4.5	
TOP MULTI-TECH 5		0.75	1		41	40	38.5	37	35	32.5	29.5	26.5	22.9	19.2	15.1	10.7	6	

Q = Flow rate H = Total manometric head

Tolerance of characteristic curves in compliance with EN ISO 9906 Grade 3B.

TOP MULTI-TECH

POS. COMPONENT

CONSTRUCTION CHARACTERISTICS

1	DELIVERY BODY	Glass fibre reinforced technopolymer
2	PUMP BODY E SUCTION FILTER	Glass fibre reinforced technopolymer
3	DIFFUSER	Glass fibre reinforced technopolymer
4	MOTOR SLEEVE	Stainless steel AISI 304
5	IMPELLERS	Noryl
6	DIFFUSER AND STAGE BOXES	Noryl complete with anti-wear ring
7	MOTOR SHAFT	Stainless steel AISI 431
8	ELECTRONIC DEVICE	TOP MULTI-TECH pumps are fitted with an internal electronic device which starts the pump when the pressure of the system falls below 1.5 bar (eg. when opening a tap) and stops it when the flow falls below 3 litre per minute. 1.5 bar = 21 psig It protects the pump: - against dry running; - against blockage: after long periods of pump inactivity the electronic device starts the pump every 48 hours for 10 seconds.

9 TWO MECHANICAL SEALS SEPARATED BY AN OIL CHAMBER

Seal	Shaft	Position	Materials		
Model	Diameter		Stationary ring	Rotational ring	Elastomer
STA-13R	Ø 13 mm	Motor side	Ceramic	Graphite	NBR
STA-12R SG	Ø 12 mm	Pump side	Silicon carbide	Graphite	NBR

10 BEARINGS

TOP MULTI-TECH 2-3	6202 ZZ - C3 / 6201 ZZ
TOP MULTI-TECH 4-5	6202 ZZ - EA3 / 6201 ZZ

11 CAPACITOR

Pump	Capacitance	
Single-phase	(220 V)	(110 V or 127 V)
TOP MULTI-TECH 2-3	12.5 µF - 450 VL	30 µF - 250 VL
TOP MULTI-TECH 4-5	14.5 µF - 450 VL	30 µF - 250 VL

12 ELECTRIC MOTOR

TOP MULTI-TECH: single-phase 220 V - 60 Hz
with thermal overload protector incorporated into the winding.

- Insulation: class F
- Protection: IP X8

13 POWER CABLE


"H07 RN-F" with Schuko plug
Standard length 10 metres

14 THREADED CONNECTOR


Threaded connector 1¼"

15 HOSE CONNECTOR WITH RING NUT

Ø 35 mm hose connection

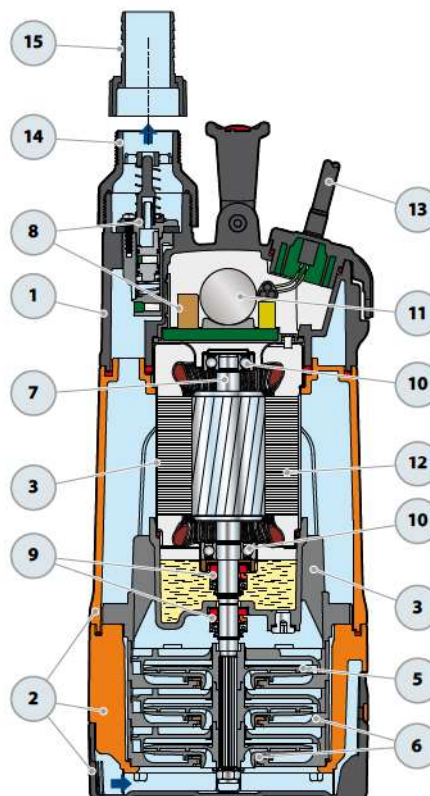

DIMENSIONS AND WEIGHT

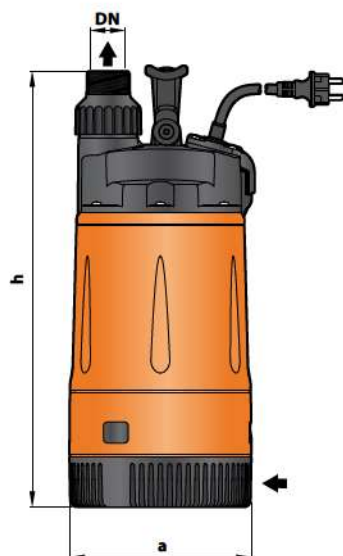

Standard installation




MODEL	PORT	N. STAGES	DIMENSIONS mm		kg
Single-phase	DN		a	h	
TOP MULTI-TECH 2	1 1/4"	3	178	428	9.3
TOP MULTI-TECH 3					
TOP MULTI-TECH 4		4		463	10
TOP MULTI-TECH 5					

ABSORPTION

MODEL	VOLTAGE		
Single-phase	220 V	110 V	127 V
TOP MULTI-TECH 2	3.4 A	6.9 A	6.2 A
TOP MULTI-TECH 3	3.7 A	7.4 A	6.7 A
TOP MULTI-TECH 4	4.3 A	8.6 A	7.5 A
TOP MULTI-TECH 5	4.7 A	9.4 A	8.2 A

PALLETIZATION

MODEL	GROUPAGE	CONTAINER
Single-phase	n. pumps	n. pumps
TOP MULTI-TECH 2	60	80
TOP MULTI-TECH 3	60	80
TOP MULTI-TECH 4	40	80
TOP MULTI-TECH 5	40	80

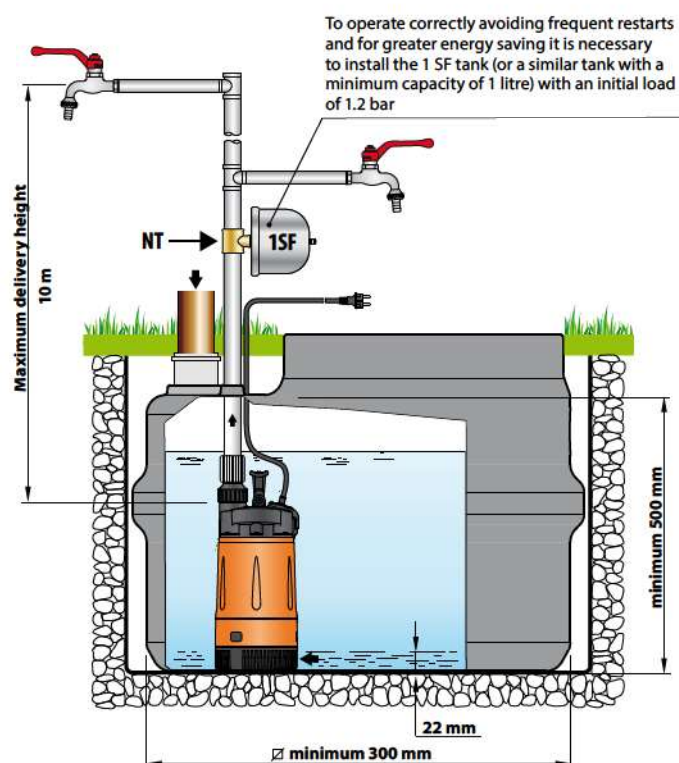

ACCESSORIOS (CAN BE ORDERED SEPARATELY)

MODEL	Code	FITTING	CAPACITY	PRE-SET	MAXIMUM WORKING PRESSURE
Tank 1 SF	 500667	1/2" (male)	1 litres	1.2 bar	10 bar
3-way fitting NT 1.25	 500160001	1 1/4" - 1 1/4" - 1/2" gas	-	-	-